

## Product datasheet

### Buffer PGB


These buffers have the highest possible durability. They follow the lorry's vertical movements 150 mm upwards and 150 mm downwards so that the buffers' wear is almost reduced to zero.

The rubber elements are made of high-quality new rubber like every PROMStahl product. They are available in two different thicknesses (90 mm or 140 mm).

The rubber elements are delivered on a hot-dip galvanized steel plate and are then welded to the leveller frame or mounted to the loading ramp.

#### PGB 90

Rubber element (thickness 90 mm) with vertical guide

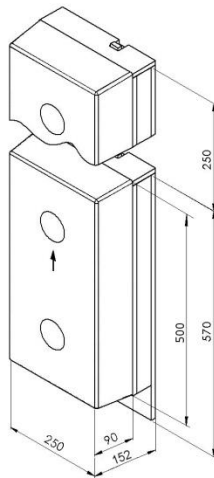

#### PGB 140

Rubber element (thickness 140 mm) with vertical guide

