



Verladetechnik Industrietore

Ronnenberger Straße 20
30989 Gehrden
phone +49 (0) 5108 879 270
www.promstahl.de

Product datasheet

Mobile aluminium drawbridge leveller
(PHF)

Version: 1.1.0

Date: 16.02.2023



Product datasheet

Mobile aluminium drawbridge leveller

Type: PHF

Load capacity : see identification plate

Contact:



Ronnenberger Straße 20
D-30989 Gehrden


phone +49 (0) 5108 879 270
fax +49 (0) 5108 879 2710

info@promstahl.de
www.promstahl.de

General information

PHF mobile drawbridge levellers are made of a 40 mm thick weatherproof chamber profile with an anti-slip layer. A mobile ramp compensates height differences and ensures a smooth ramp angle. As a standard, a rubber profile is located at the bottom of the leveller to prevent displacement during loading operations. Optionally, it is possible to equip the drawbridge leveller with protecting arms.


Overview

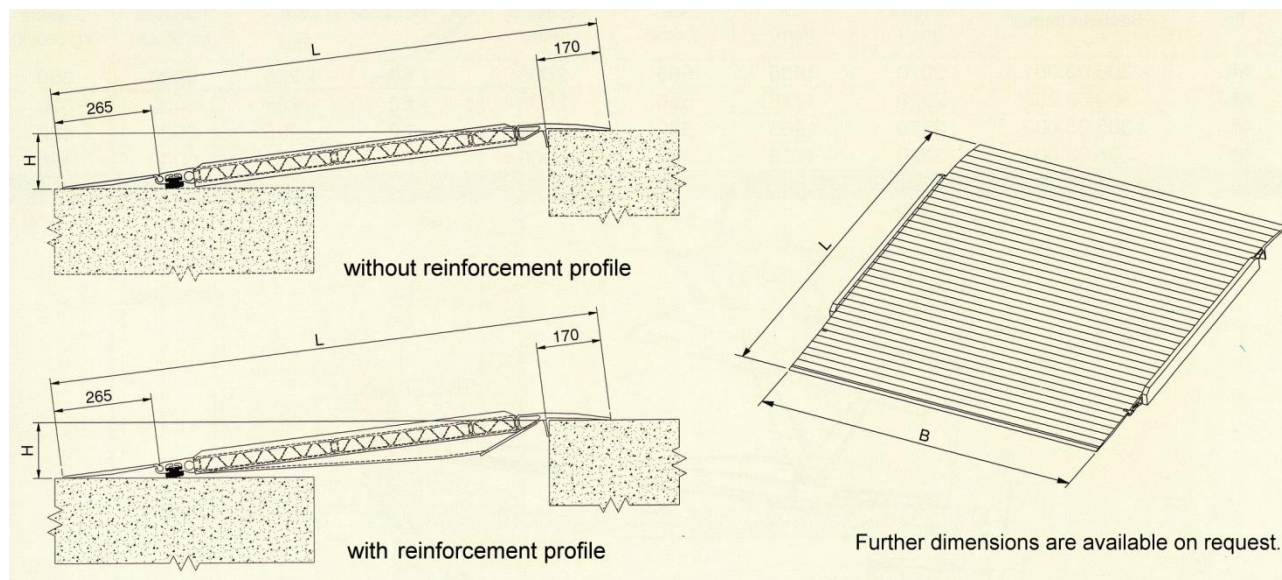

Version without reinforcement profile				
Nominal length	Nominal width	difference in height min. max.		Load capacity kN
1235	1250, 1500	0	+110	40
1485	1250, 1500	0	+140	35
1735	1250, 1500	0	+170	30
1985	1250, 1500	0	+200	20
2235	1250, 1500	0	+235	18
2485	1250, 1500	0	+265	16
All dimensions in mm.				

Version with reinforcement profile				
Nominal length	Nominal width	difference in height min. max.		Load capacity kN
1485	1250, 1500	+75	+140	40
1735	1250, 1500	+90	+170	40
1985	1250, 1500	+110	+200	40
2235	1250, 1500	+125	+235	40
2485	1250, 1500	+145	+265	40
All dimensions in mm.				

Options

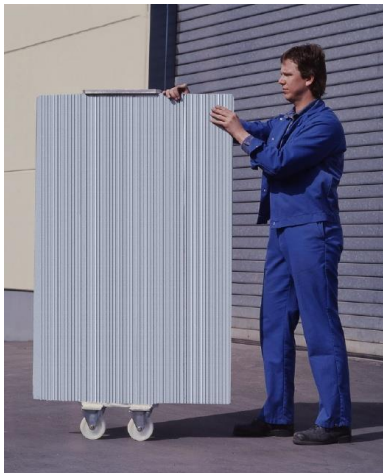

Transport wheels



Steel transport trolley



Leveller with retractable fork grips



Leveller with safety arms