



**PROMSTAHL**

Verladetechnik

Industrietore

Ronnenberger Straße 20  
30989 Gehrden  
phone +49 (0) 5108 879 270  
www.promstahl.de

**Product datasheet**  
**Mobile yard ramp**  
(type PAR/ PARP)

Version: 1.3.0

Date: 06.02.2023



## Product datasheet

**Mobile yard ramp**

**Type: PAR/ PARP**

**Load capacity: 70 kN/ 100 kN**

**Contact:**



**PROMSTAHL**

Ronnenberger Straße 20  
D-30989 Gehrden

phone +49 (0) 5108 879 270  
fax +49 (0) 5108 879 2710

info@promstahl.de  
www.promstahl.de

## Mobile yard ramp (PAR/PARP)

The mobile yard ramps are part of PROMStahl's wide product range. They offer the possibility of loading and unloading trucks, containers or wagons directly from yard level. The whole maneuvering and loading process can be managed by just one person.

The ramps are made of robust welded steel and the whole driving range consists of stable grids that are optimally dimensioned and suited for heavy loads. For accident prevention the ramp is equipped with lateral protection bars on the left and right side.


The mobile yard ramp is available in its standard version (PAR) or with an additional horizontal platform (PARP). For loading and unloading of high loads the PARP version is recommended with the forklift truck safely entering the lorry via the horizontal part of the ramp.

### Technical details:

- robust steel
- optimal manoeuvrability even for small spaces
- heavy-duty wheels
- anti-slip and open hot-dip galvanized grids
- Load capacities: 7 t and 10 t
- infinitely variable height adjustment of the ramp by means of a manual hydraulics pump
- high-stability safety chain for fixing the mobile yard ramp to the truck, container and wagon
- floating position for optimal adaption of the vehicles during the loading or unloading process
- high-quality corrosion protection (available in RAL colours or hot-dip galvanised version)
- movable by means of forklift truck
- load hook for forklift truck (for fast moving of the yard ramp)

TYPE	PAR	PARP
Overall length	9500 mm	11500 mm
Overall width for load capacity of 7 t	2340 mm	2360 mm
Overall width for load capacity of 10 t *)	-	2380 mm
Height adjustment range	850 – 1750 mm	

### Mobile yard ramp (PAR)

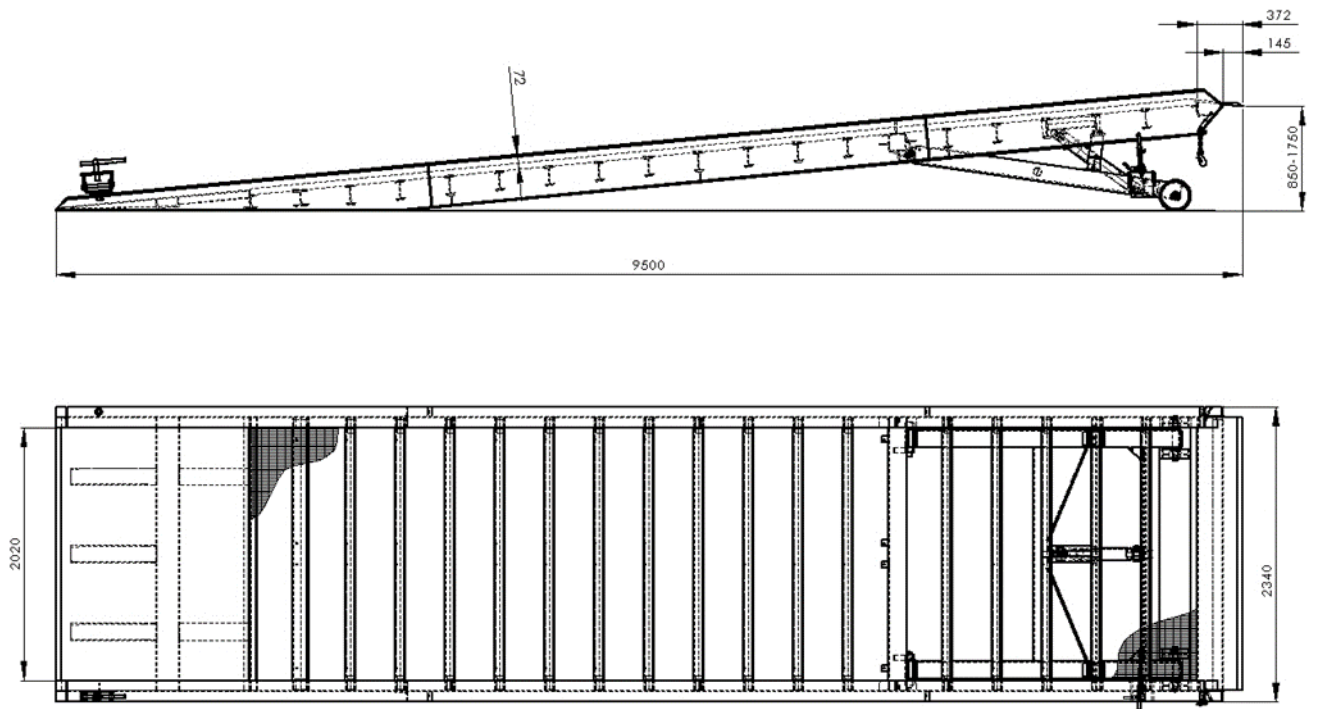

### Mobile yard ramp (PARP)

