



**PROM STAHL**

Verladetechnik

Industrietore


Ronnenberger Straße 20  
30989 Gehrden  
phone +49 (0) 5108 879 270  
www.promstahl.de

## Product datasheet

Stationary dock leveller with swing lip  
(PS2)

Version: 1.3.0

Date: 26.05.2025

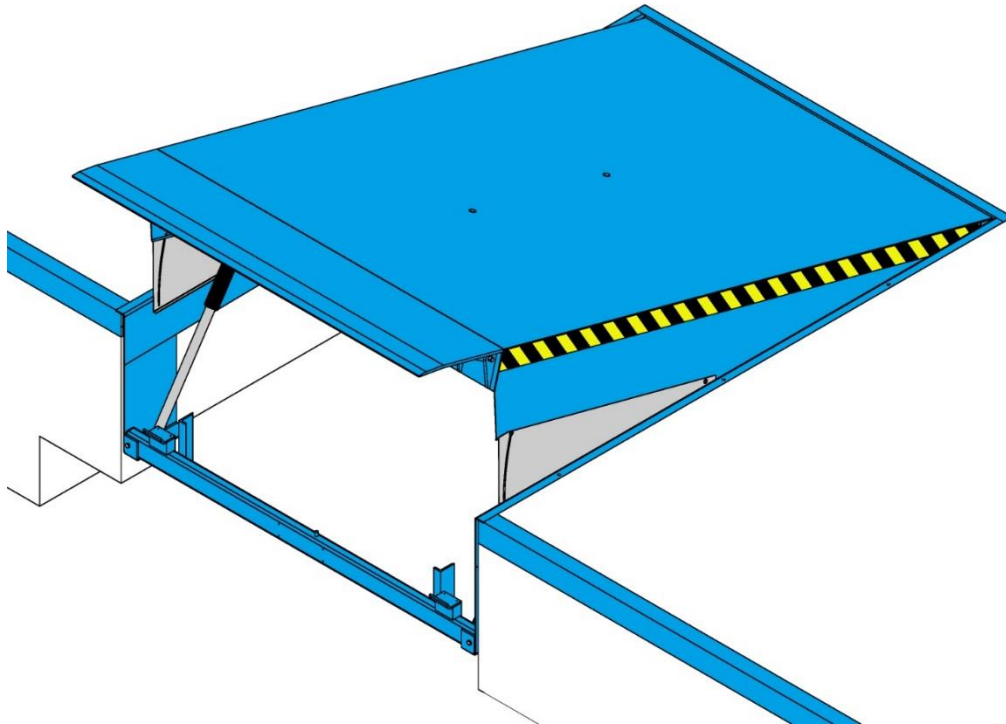

## Product datasheet

Hydraulic dock leveller with swing lip

Type: PS2

Load capacity: 150 kN

### Contact:



**PROM STAHL**

Ronnenberger Straße 20  
D-30989 Gehrden

phone +49 (0) 5108 879 270  
fax +49 (0) 5108 879 2710

info@promstahl.de  
www.promstahl.de


# Contents

|   |    |
|---|----|
| General information .....                       | 3  |
| Overview.....                                   | 3  |
| Standard parameters .....                       | 4  |
| Options .....                                   | 4  |
| Design characteristics.....                     | 4  |
| Swing lip.....                                  | 5  |
| Standard swing lip .....                        | 5  |
| Swing lip options.....                          | 5  |
| Platform.....                                   | 6  |
| Tear-plate thickness.....                       | 6  |
| Toe guards .....                                | 6  |
| EPDM sealing.....                               | 7  |
| Anti-slip / anti-noise coating .....            | 7  |
| Surface treatment.....                          | 8  |
| Painting.....                                   | 8  |
| Hydraulic unit .....                            | 8  |
| Frames / pits .....                             | 9  |
| T frame (to be embedded in concrete) .....      | 9  |
| W frame (in combination with a pre-frame) ..... | 10 |
| B (box).....                                    | 11 |
| Control units .....                             | 12 |
| Accessories.....                                | 13 |
| Buffers .....                                   | 13 |
| Fixed-position buffers.....                     | 13 |
| Height-adjustable buffers .....                 | 14 |
| Floating buffers.....                           | 14 |
| Buffers with protective housing .....           | 15 |
| Spring-steel buffer .....                       | 15 |
| Wheel chock .....                               | 16 |
| Traffic lights .....                            | 16 |
| Dock light.....                                 | 16 |
| Wheel guides.....                               | 16 |
| Electrical preparations (by others) .....       | 17 |

## General information

The stationary dock leveller with swing lip (PS2) is a new product of PROMStahl's wide product range. This top-quality product benefits from over many years of experience in designing and manufacturing docking systems. The electro-hydraulic PS2 leveller is operated at the touch of a button. As soon as the platform has reached its highest position the lip swings out automatically and comes to rest on the lorry bed. During loading and unloading the PROMStahl dock leveller follows the movements of the vehicle (automatic floating position). The PS2 dock leveller is supplied including frame and installed in the pit as a compact unit in just one step. Additional supports are not necessary. Considerable savings in installation and its tail-lift recess, i.e. the possibility to accommodate tail lifts, are the big advantages of this system. The load capacity of the PS2 dock leveller corresponds to the axle load limit taking into consideration the most unfavourable loading case. The PROMStahl dock leveller meets the requirements of the most recent European standards (EN 1398).

### Overview

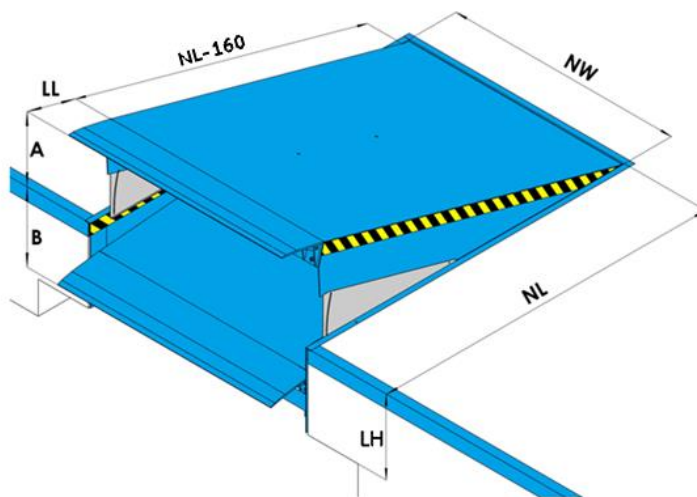

- NL Nominal length
- NW Nominal width
- LL Lip length
- LH Leveller height
- A Level equalisation above dock
- B Level equalisation below dock

In accordance with the EN 1398 standard, the leveller must not be used beyond the permissible gradient range of  $\pm 12.5\%$  (about  $\pm 7^\circ$ ). The limits may only be exceeded if the operator ensures that the danger of slipping has been eliminated (e.g. due to dry and clean surfaces).

| Dock leveller                                  |     | LL=500               |     |
|--|-----|----------------------|-----|
| NL   | LH  | A                    | B   |
| 2000   | 700 | 140                  | 220 |
| 2500   | 700 | 250                  | 310 |
| 3000   | 700 | 290                  | 310 |
| 3500   | 800 | 210                  | 360 |
| Nominal width (NW) 2000 and 2250 for all sizes |     | All dimensions in mm |     |

Load capacity for all sizes: 150 kN (dynamic), 210 kN (static).  
Further load capacities and sizes on request.


## Standard parameters

|                          |   |
|--------------------------|---|
| Swing lip                | Angled swing lip, lip length: 500 mm<br>Chamfered section: 60 mm<br>Tear-plate thickness: 20 mm/22 mm   |
| Platform                 | Tear-plate thickness: 12 mm/14 mm   |
| Frame                    | T frame (leveller frame to be embedded in concrete)<br>W frame (in combination with a pre-frame)  |
| Surface                  | Painted, standard colours: RAL 5010, RAL 7016, RAL 9005   |
| Hydraulic unit           | Hydraulic unit: 0.75 kW<br>- 2 lift cylinders with emergency stop valve<br>- 1 lift cylinder for the swing lip<br>Standard oil (-20°C to +60°C) |
| Sound pressure level LpA | ≤ 70 dB(A)  |
| Control unit             | Control unit with auto button   |

## Options

|               |   |
|---------------|---|
| Swing lip     | Straight swing lip, lip length: 500 mm,<br>chamfered section 100 mm<br>Swing lip with tapered edges (125 mm on both sides)                                      |
| Frame         | B frame (Box)<br>Special  |
| Surface       | Painting in different RAL colours and various layer thicknesses<br>Hot-dip galvanization<br>Duplexbeschichtung  |
| Hydraulic oil | Organic oil (-20°C to + 60°C)<br>Low-temperature oil (- 30°C to + 40°C)   |
| Control unit  | Special control unit with additional options  |
| Others        | EPDM sealing<br>Anti-slip / anti-noise coating<br>Platform insulation: ISO panel (thickness: 40 mm, 60 mm)<br>Front protection curtain for the tail lift recess |


## Design characteristics

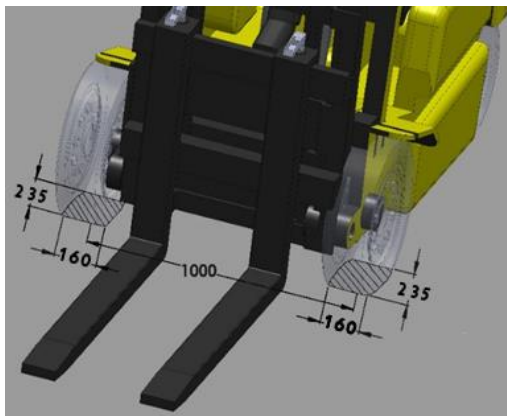


The PS2 dock leveller meets all requirements of the EN 1398 standard. The standard load capacity of 150 kN (dynamic axle load) corresponds to the EN 1398 standard for a forklift wheel contact surface of 160 x 235 mm. Higher concentrated loads as well as higher load capacities are available on request.

## Swing lip

### Standard swing lip

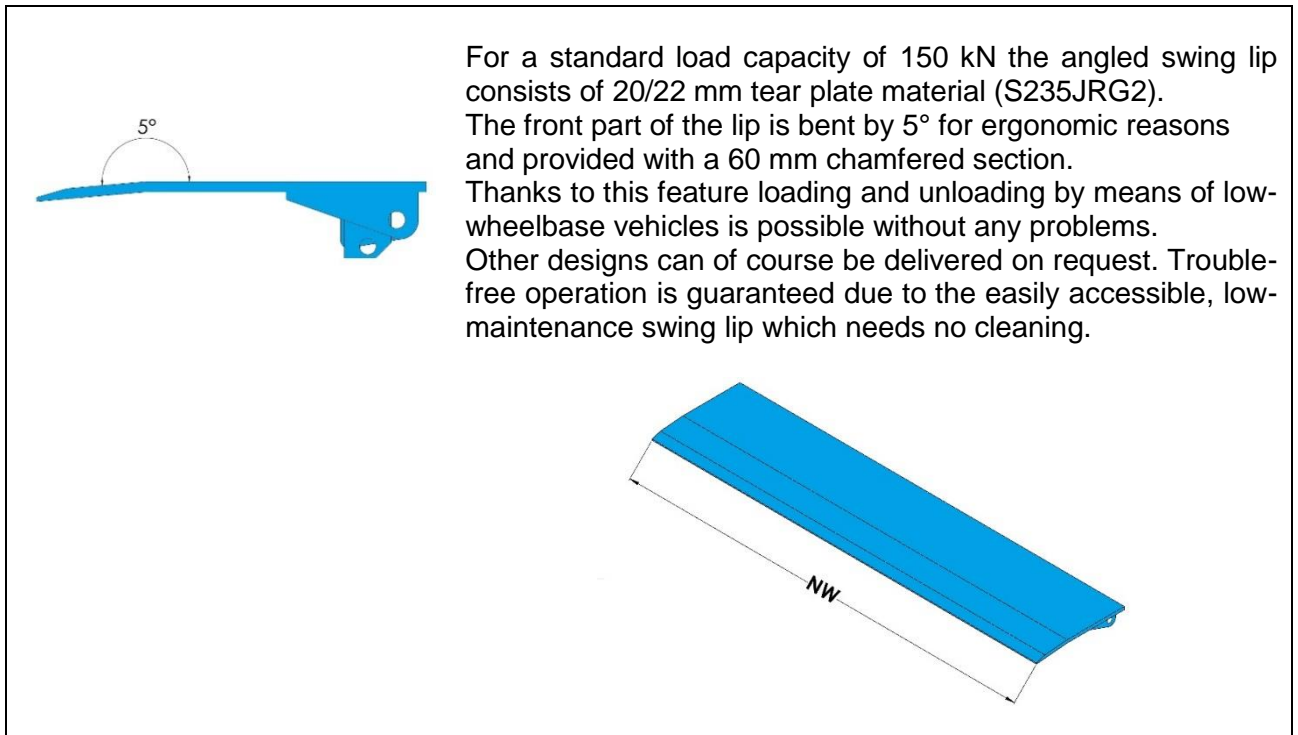


### Swing lip options

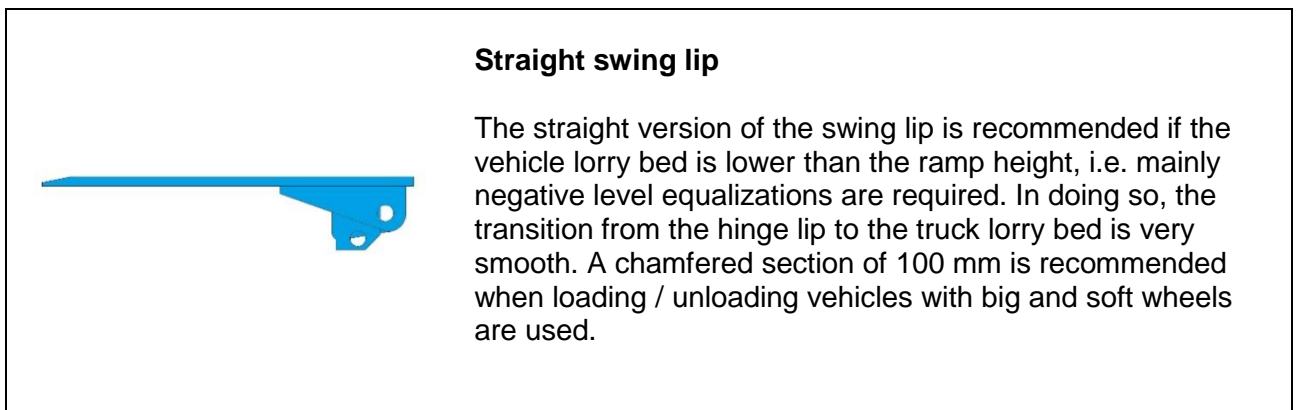

### **Tapered lip**

The most cost-effective way to reduce the contact area of the swing lip is to provide it with tapered edges on both sides.

This option offers 125 mm bevels on both sides. Recommended for  $NW \geq 2200$  mm.

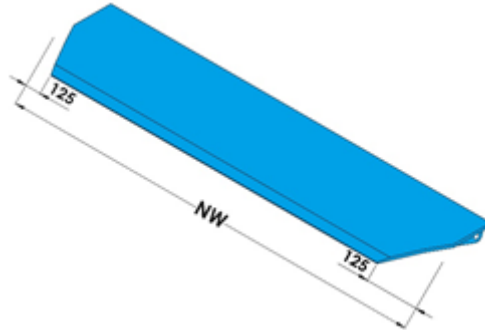


## **Platform**

### **Tear-plate thickness**

The platform consists of high-quality tear-plate material (S235JRG2) and supplied with a thickness of 12/14 mm. It is strengthened by means of special reinforcements guaranteeing optimal stability as well as a sufficient transverse torsion strength of up to 10% of the platform's width. Optimised connection between the platform and the lip guarantee safe operation and a long lifespan.


### **Toe guards**

The dock leveller is always provided with lateral toe guards to prevent foot injuries when the leveller moves downwards.

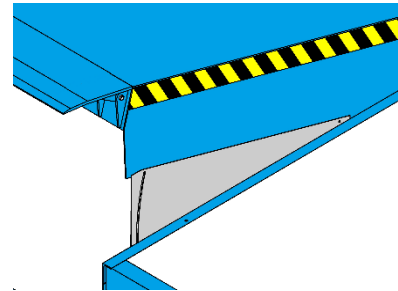

## EPDM sealing


The EPDM sealing is used to seal the gap between the dock leveller and the pit so that draught in the warehouse building is reduced, the staff's working conditions are improved and energy can be saved. The EPDM sealing is installed on the three sides of the leveller.

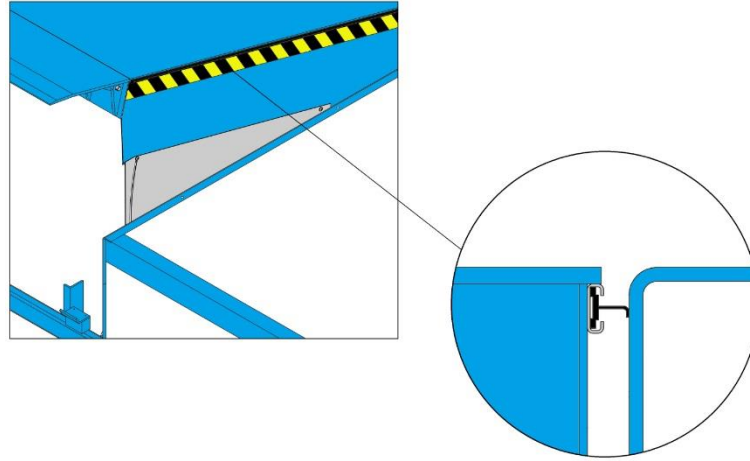

## Anti-slip / anti-noise coating


As an option, it is possible to provide the platform and the swing lip with a special anti-slip / anti-noise layer. This coating consists of high-elasticity solvent-free polyurethane with a material thickness of 3-4 mm filled with sharp-edge broken basalt (grain size 1-1.6 mm).

This type of coating guarantees a high degree of anti-slip and anti-noise protection and is applied to profiled material. That's why the requirements of DIN EN 1398 regarding slip prevention are met even if this coating is damaged.

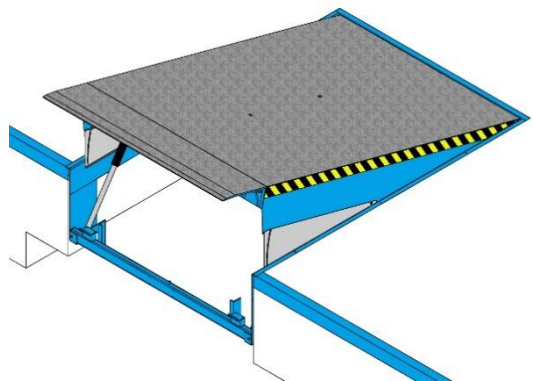

## Platform insulation

In these days, energy saving is an important topic. Therefore, it is essential to optimally insulate the docking station. If the dock leveller is located outside the door opening, the platform insulation panel prevents cold or warm air from entering the warehouse inner area. The leveller platform is insulated by means of 40 mm or 60 mm insulation panels. To guarantee best possible sealing effect, it is recommended to combine the platform insulation with the EPDM sealing.

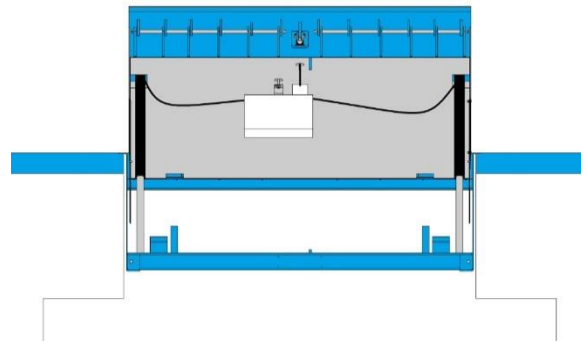

## Surface treatment

### Painting

Before final assembly, the individual components of the dock leveller are sandblasted and provided with a two-component paint. Standard RAL colours are RAL 5010, RAL 7016 and RAL 9005 in a layer thickness from 60 µm to 80 µm (corrosion protection class C2-M). Further RAL colours and layer thicknesses of up to 160 µm (corrosion protection class C3-H) are available as an option. To improve corrosion protection, the dock leveller can also be delivered with hot-dip galvanized steel parts or with a duplex coating (painted coating on hot-dip galvanization).

## Hydraulic unit

The dock leveller is operated by means of a tried and tested hydraulic unit (0.75 kW). The closed system stands out for its high reliability even under very difficult operating conditions. We offer special hydraulic oils for use with low-temperature applications.

The dock leveller is lifted by means of two cylinders to ensure safe positioning even if the lorry leaves the dock during loading or unloading. In this case the down movement of the leveller has to be stopped; this is guaranteed by means of special emergency valves in the lift cylinders.


The lip is swung out by means of a lip cylinder.





## Frames / pits

### T frame (to be embedded in concrete)

The leveller is directly cast into concrete including its frame.  
Advantage: fast and clean installation in one step.

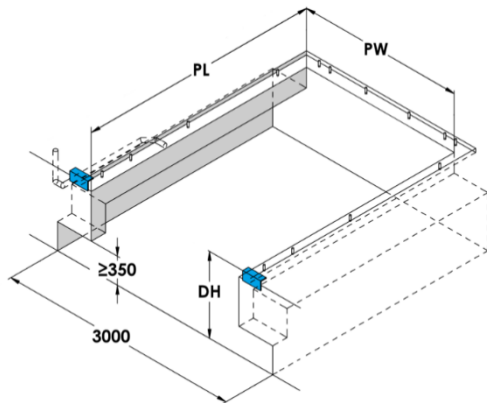

Pit with tail-lift recess  
PSE.00.00.01

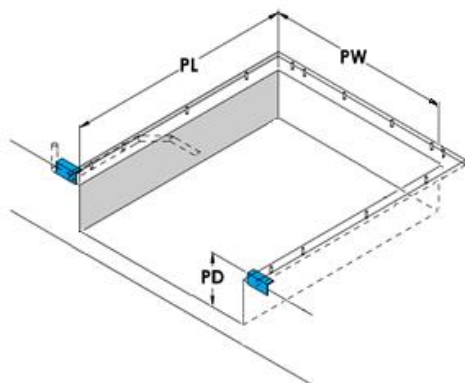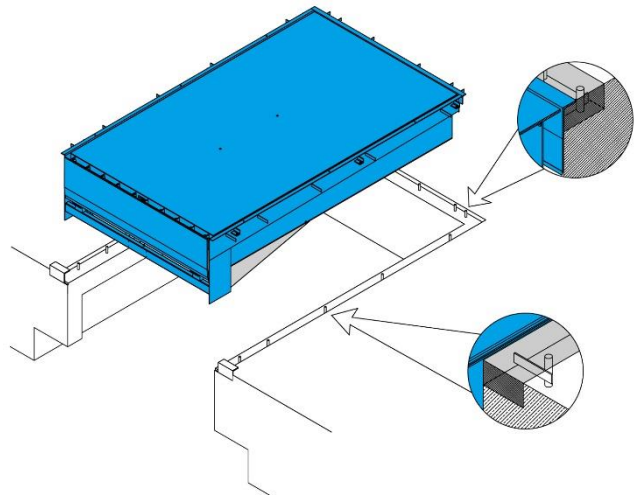




Pit without tail-lift recess  
PSE.00.00.05

**PL** Pit length  
**PW** Pit width


**DH** Dock height  
**PD** Pit depth

## W frame (in combination with a pre-frame)

The frame can be mounted to the floor slab already before installation of the dock leveller itself. The leveller is then welded to the pre-installed frame. Pit preparations are identical for T and W type frames so that maximum flexibility is guaranteed.

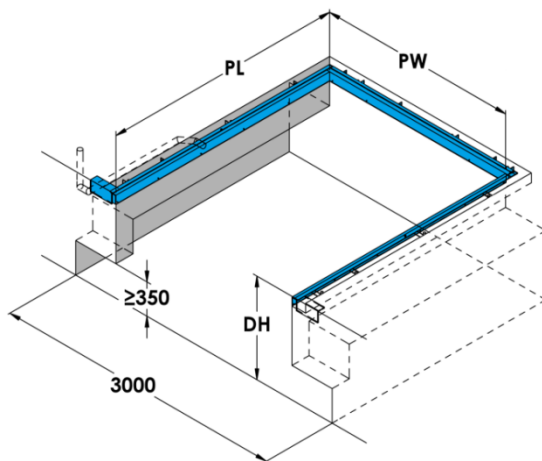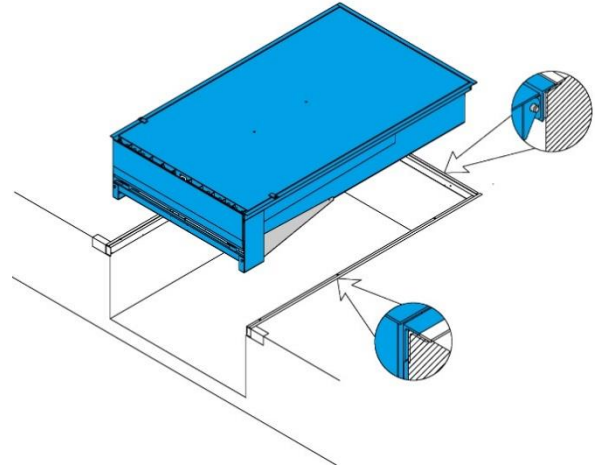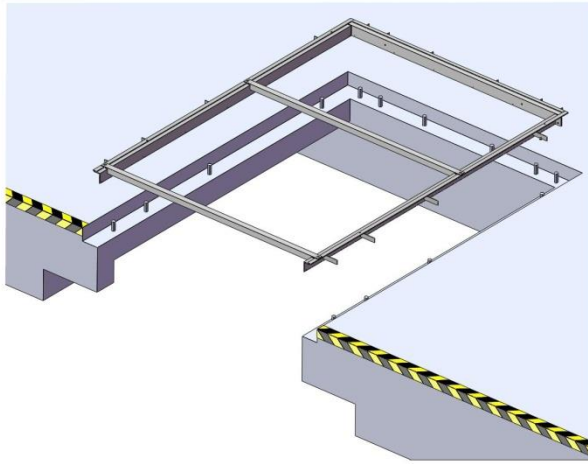

Pit with tail-lift recess  
PSE.00.00.01

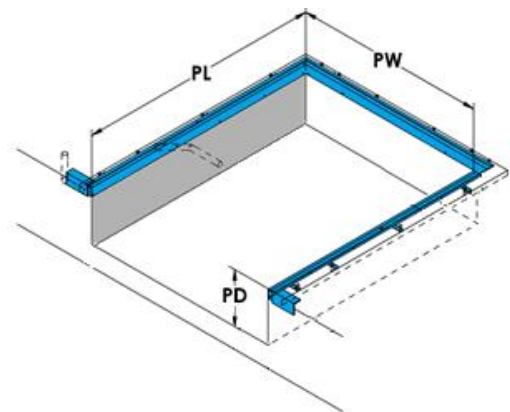


Pit without tail-lift recess  
PSE.00.00.05

**PL** Pit length  
**PW** Pit width

**DH** Dock height  
**PD** Pit depth


## B (box)

No need to prepare a standard installation pit. Preparation of the building floor slab is much easier as boarding work is not necessary.

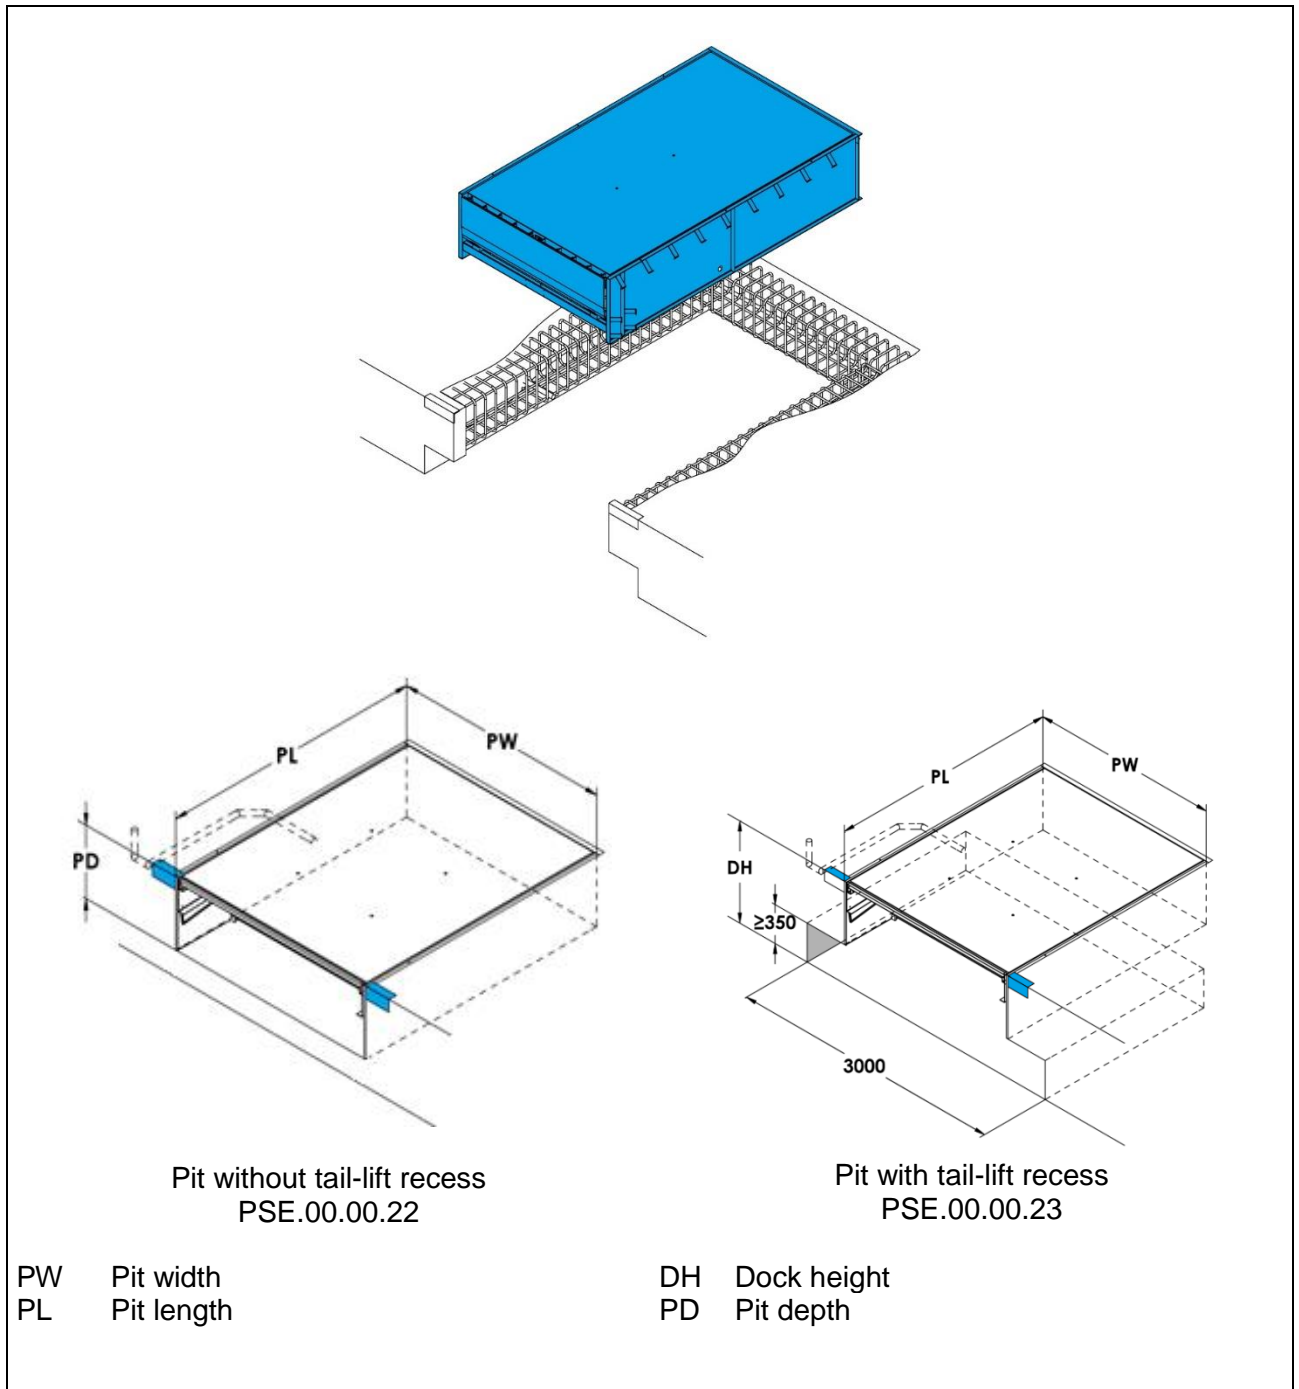

## Control units

Standard DOCKController PS, with auto button (PBES 1MV 17 02)

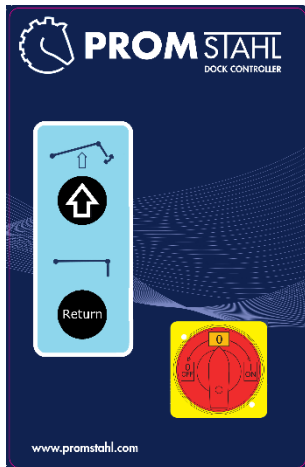

- Main switch
- „Lift“ button to lift the platform and to swing out the lip and position it on the lorry bed.
- “Auto” button (to return the leveller to its resting position by shortly pushing this button).
- Possibility of connecting an industrial door.
- Connection possibility: door/leveller interlocking via door control unit or via a sensor (NO or NC contact).
- It is not possible to connect further consumers.

Option PROMControl, with auto button, (PBES 1MV SPH 03)



- Main switch
- „Lift“ button to lift the platform and to swing out the lip and position it on the lorry bed.
- "Auto" button (to return the leveller to its resting position by shortly pushing this button).
- Possibility of connecting a wheel chock, a vehicle detection system, traffic lights, dock lights, a pneumatic dock shelter and a door locking system.

Option PROMControl, with auto button, (PBES 1MV SPH 05)




- Main switch
- „Lift“ button to lift the platform and to swing out the lip and position it on the lorry bed.
- "Auto" button (to return the leveller to its resting position by shortly pushing this button).
- Possibility of connecting a wheel chock, a vehicle detection system, traffic lights, dock lights, a pneumatic dock shelter and a door locking system.
- Including door operation button (24 VDC)

# Accessories

## Buffers

Fixed buffers as well as movable buffers are designed to absorb impact during the docking process protecting both the vehicle and the docking system. All rubber elements of our PROMStahl buffer series are made of high-quality rubber ensuring a long service life.

### Fixed-position buffers

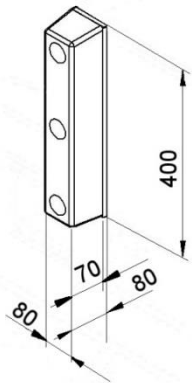


**PGF 70**

Rubber element (thickness 70 mm) with plate (hot-dip galvanized)

Standard high-quality rubber buffer with a high resistance to wear and tear for lower loading frequencies


**PGF 90**

Rubber element (thickness 90 mm) with plate (hot-dip galvanized)

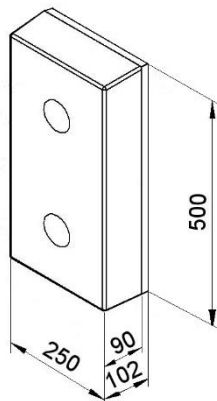

**PGF 140**

Rubber element (thickness 140 mm) with plate (hot-dip galvanized)

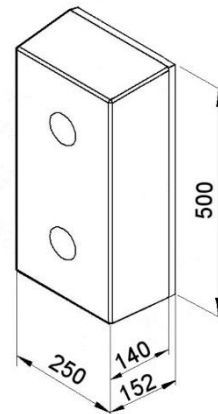


PGF 90 and PGF 140 are designed for extremely high impact forces

## Height-adjustable buffers

### PGV 90

Buffer with vertical guide  
(rubber element: thickness 90 mm)

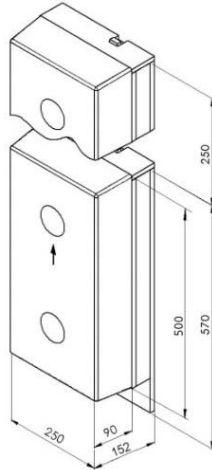


These buffers are used for loading and unloading of vehicles whose lorry beds are higher than dock level. Height-adjustable buffers can be lifted by up to 250 mm above dock edge. During loading and unloading the buffer adjusts to the lorry's vertical movements. It moves up to 50 mm upwards and 250 mm downwards. Thus, the buffer's wear is reduced to minimum and its durability is extended. After docking the buffer can be fixed at dock level so that the lorry tailgates can be opened.

## Floating buffers

### PGB 90

Buffer with vertical guide  
(Rubber element: thickness 90 mm)

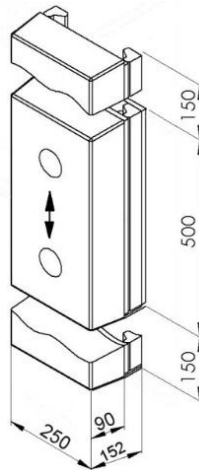


These buffers have the highest possible durability. They follow the lorry's vertical movements by 150 mm upwards and 150 mm downwards so that the buffers' wear is almost reduced to zero.

## Buffers with protective housing


### PGFS 90

Buffer with protective housing  
(rubber element: thickness 90 mm)



### PGFS 140

Buffer with protective housing  
(rubber element: thickness 140 mm)




For higher impact loads buffers with protective housing are recommended. The sloped protective plate prevents the buffers from being heavily damaged. Thanks to the lateral flat steel guides the fixing bolts of rubber buffers are optimally protected against shearing.

## Spring-steel buffer


### PGS 600

Spring-steel buffer with plate (hot-dip galvanized)  
Spring-steel plate (t=15 mm) and rubber buffer (Ø 130 mm)



### PGS 800

Spring-steel buffer with plate (hot-dip galvanized)  
Spring-steel plate (t=15 mm) and rubber buffer (Ø 130mm)

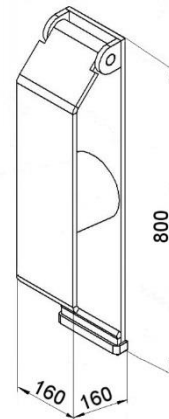

Spring-steel buffers provide optimum protection for heavy-duty loading and unloading. These buffers stand out for their excellent shock-absorbing characteristics, maximum resistance to wear and long service life.

During loading/unloading only the buffer steel plate gets into contact with the vehicle. Thus, normal tear of the surface caused by the vehicle's height movements is excluded. Costly buffer replacement is avoided and operating costs are reduced.

The spring-steel buffer is either welded to the frame or dowelled to the leveller.

Optionally, it is possible to mount the buffer 200 mm above the dock edge by means of a support.

### Wheel chock



The PZK wheel chock equipped with a position-dependent ultrasonic sensor and connected to the control unit via a robust cable guarantees safety during the whole loading and unloading process. As soon as one of the rear wheels of the lorry is stopped by means of the wheel chock, the leveller control function is “released” so that operation of the dock leveller can be started.

### Traffic lights



Inside and outside traffic lights represent a reasonable completion of the docking station. It is recommended to provide the loading station not only with a wheel chock but also with a traffic lights system.

PROMStahl PBEA traffic lights systems assure communication between the lorry driver and the warehouse staff. They show the driver when the docking station can be approached and left safely. The traffic lights are connected to the PROMStahl control unit and adjustments/programming can be adapted to your individual requirements.


### Dock light



In general, the danger of accidents during loading/unloading is very high due to bad lighting of the docking area. PROMStahl dock light provide the best solution for perfect lighting of the docking area and the vehicle lorry bed.

As an alternative, we can offer our dock light PV 13 with fan.

### Wheel guides

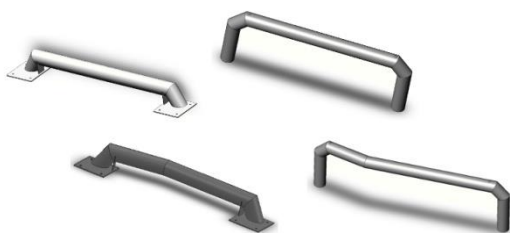

Wheel guides help the truck driver to reverse to the loading bay without any complicated maneuvering actions. They are installed on yard level, either by being cast directly into concrete (types PEK and PEKE) or by being bolted on the ground (types PEF and PEFE); they represent a good and reasonable investment into the safety at your loading bay.



## Electrical preparations (by others)

